



CONTROL PANEL OPTIONS

OPTION A

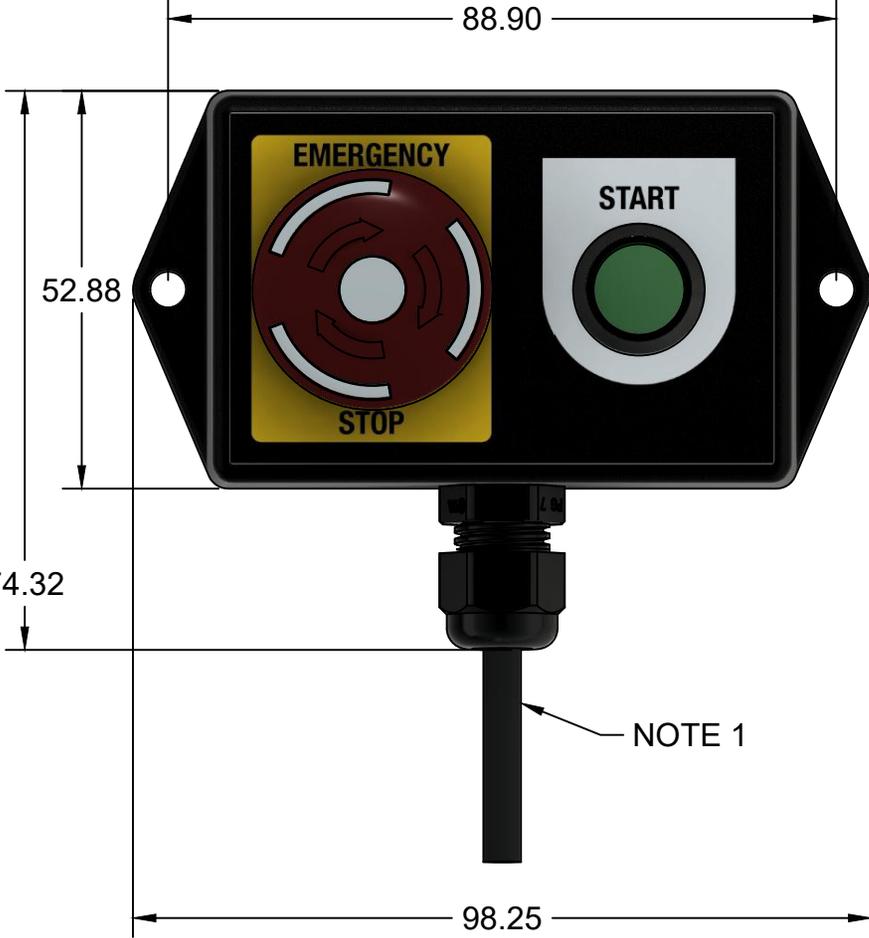


OPTION B

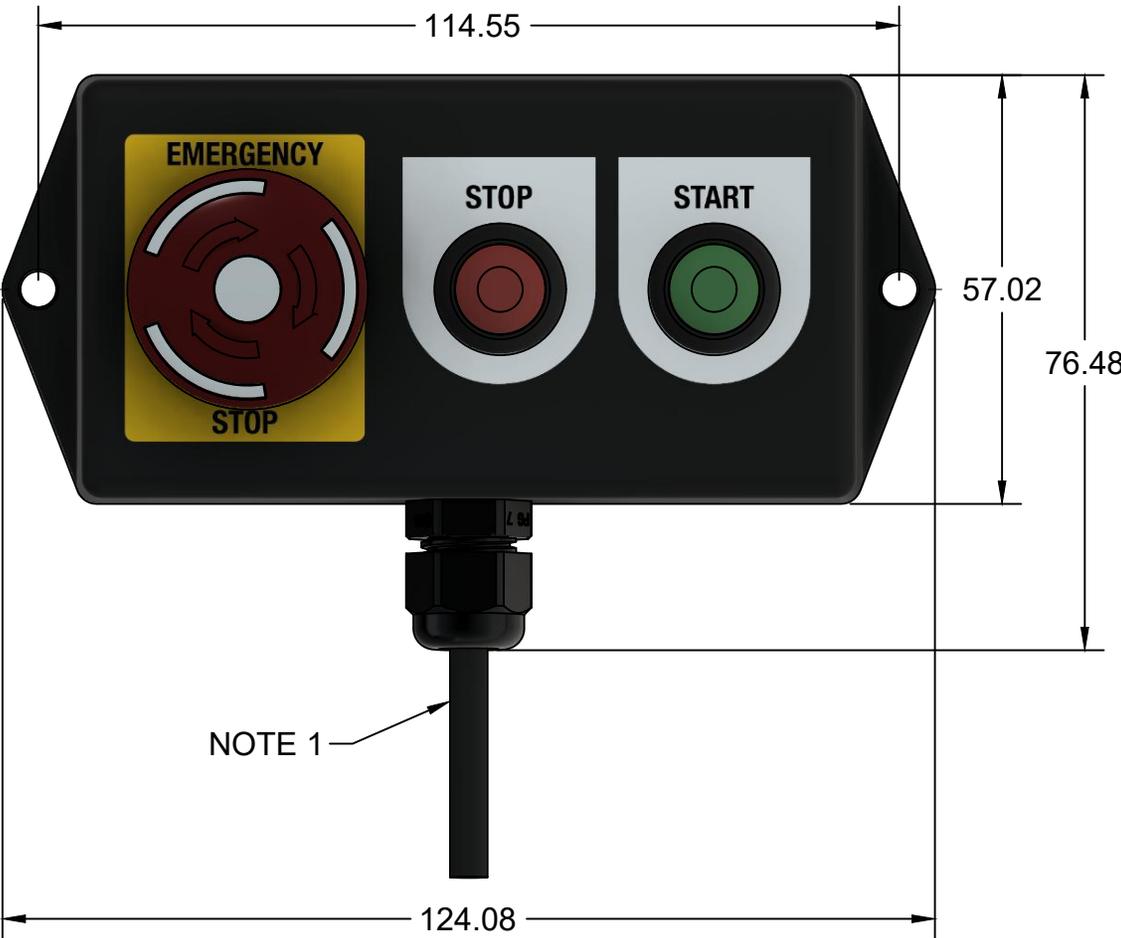

NOTE 1: PROVIDE ADEQUATE SPACE BELOW CONTROL PANEL FOR A MINIMUM CABLE BEND RADIUS OF 25MM. ALTERNATE CABLE EXIT DIRECTIONS AVAILABLE BY SPECIAL ORDER.

| | | | |
|--------------------------------|---------------------|--------------------|------------------|
| PROJECT | | | |
| MAKESafe Power Tool Brake v3.6 | | | |
| TITLE | | | |
| Control Panel Options | | | |
| UNITS MM | REV 10/28/19 | SIZE LETTER | SCALE 1:1 |

CONTROL PANEL OPTION

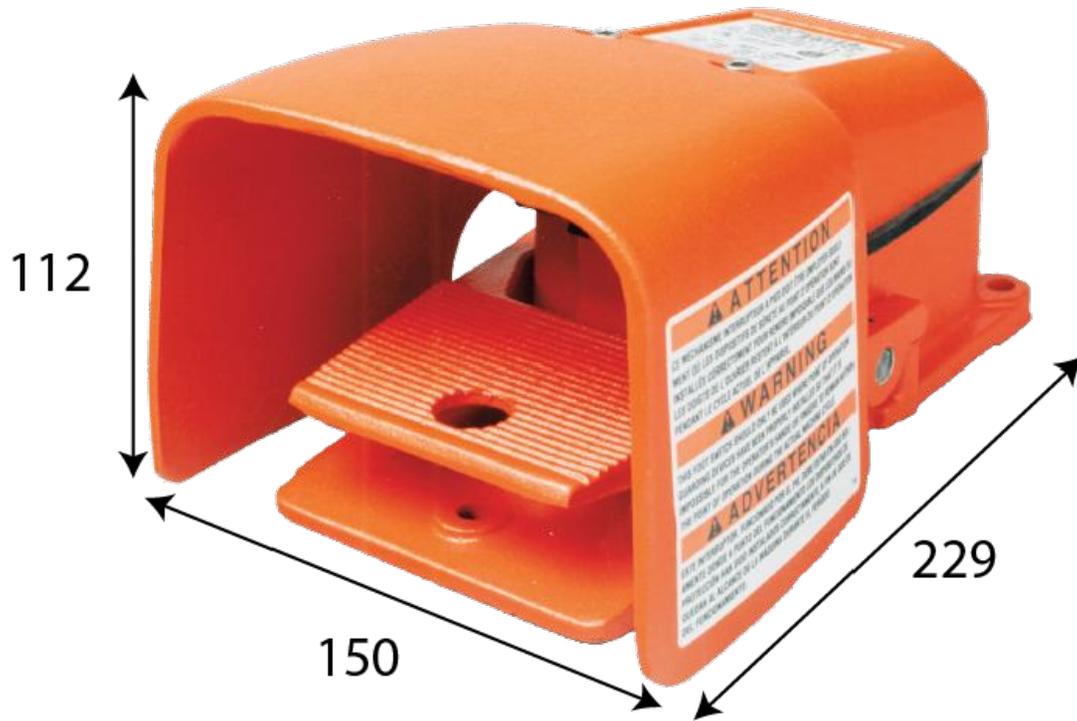

CONNECTIONS

FOOT SWITCH SUPPLIED WITH STANDARD M12 CONNECTOR AND PLUGS INTO MATING CONNECTOR ON POWER TOOL BRAKE.

OPERATION

- DEPRESS AND HOLD FOOT SWITCH TO OPERATE MACHINERY.
- RELEASE FOOT SWITCH TO BRAKE MACHINERY.

NOTE 1: PROVIDE ADEQUATE SPACE BEHIND FOOT SWITCH FOR CABLE GLAND AND CABLE BEND RADIUS.

PROJECT

MAKESafe Power Tool Brake v3.6

TITLE

Control Panel Options

UNITS MM

REV 11/19/19

SIZE LETTER

SCALE